




Standoblue Basecoat

Nissan KAB Bluish Silver

- **Special effect colour**
- **Specific application process**

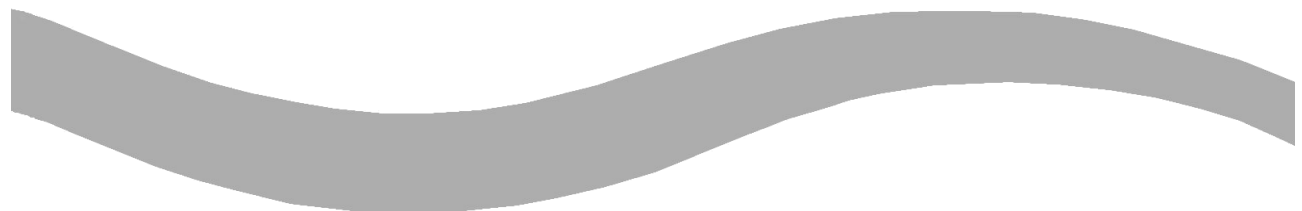

Technical Description:

- Thin with 50 % Standoblue Viscosity Adjuster Slow "New"
- Painting system S9.15 describes the special blending-in process

Standoblue Basecoat Nissan KAB Bluish Silver

Substrate:

- Sanded Standox VOC Xtra Filler U7560 or Standox VOC System Filler U7540
- Through-hardened sanded paintwork

Do not forget cleaning!

Pretreatment / Cleaning:



For substrate preparation information see Standox Painting System S1.




Use air fed respirator. Refer to relevant Health and Safety Data sheets.

1 normal coat
1 light coat with increased distance to object


Flash off time can be reduced by

- Using air blower
- Spray booth blower system
- Infrared drying
- Increasing spray booth temperature to max. 45°C until matt

Application:




A Standocryl VOC Clear must be applied completely over any repaired panels, then cured and sanded



Orbital sanding machine P1000-P1500
Edges and corners P3000 handsanding




Add 50% Standoblue Viscosity Adjuster Slow "New" to the KAB colour for standard application.




Compliant 1.2 - 1.3 mm
2.0 bar inlet pressure
1.5 = 10 - 15 micron



HVLP 1.2 - 1.3 mm
0.7 bar atomization pressure
1.5 = 10 - 15 micron



Final flash off until matt



Standocryl VOC Platinum Clear K9570

Standoblue Basecoat Nissan KAB Bluish Silver

Flashpoint:

- 50°C / 122°F

Specific Gravity:

- 1.0 g/cm³

Solid Content

(without thinner added):

- 12.2 Weight %
- 10.6 Volume %

VOC (2004/42/EC):

2004/42/IIB(d)(420)420

The EU limit value for this product (product category: IIB.d) in ready for use form is max 420 g/litre of VOC. The VOC content of this product in ready for use form is max. 420 g/l.

Theoretical

Coverage:

- 11 m²/l at 15 micron dry film thickness

Cleaning of equipment:

Rinse first with Standox Demineralized Water.
Clean after use with Standox Cleaning Thinner.

Important remarks:

- The equipment for water thinnable products must be compatible with waterbased products.
- When collecting waste for disposal separate water-thinnable products from conventional ones, otherwise waste disposal will be more difficult and expensive, if not impossible.
- Large blend-in possible only.
- Painting system S9.15 describes the special blending-in process
- Best results with SATA NR3000 HVLP 1.3 mm spray gun
- Standoblue Viscosity Adjuster Slow "New" should be added to the Standoblue KAB mixed colour directly before application, best results are when used within same working day.

For professional use only! The information provided in this documentation has been carefully selected and arranged by us. It is based upon our best knowledge on the subject at the date of issuance. The Information is given for information purposes only. We are not liable for its correctness, accuracy and completeness. It is up to the user to check the information with regard to up-to-dateness and suitability for his intended purpose. The intellectual property in this Information, including patents, trademarks and copyrights, is protected. All rights reserved. The relevant Material Safety Data Sheet and Warnings displayed on the product label need to be observed. We may modify and/ or discontinue operation of all or portions of this Information at any time in our sole discretion, without notice and assume no responsibility to update the Information. All rules set forth in this clause shall apply accordingly for any future changes and amendments.