


Standex VOC System Filler U7540



Standex VOC System Filler U7540 offers high-performance and it very economical. It is chromate-free and ideal for universal use. It can easily be applied on almost any substrate, from factory primed substrates to sanded Standox polyester substrates. Standox VOC System Filler U7540 demonstrates extreme vertical stability, dries quickly, provides good build-up and cures very well. Even at high film thicknesses, the surface remains free of blisters. Its good filling properties ensure the surface is easy to sand, wet or dry, and provide excellent topcoat holdout, which helps to save time and money. It can be overcoated with high solid topcoats and conventional or waterborne basecoats.

- Easy to sand.
- Good filling properties.
- Good insulating properties.
- VOC compliant.
- Optimal topcoat holdout.
- Extremely high filling power thanks to the high solids content (70% when ready to use).
- Various hardening options: 4:1 with Standox HS Hardener or 7:1 with Standox VOC Hardener.

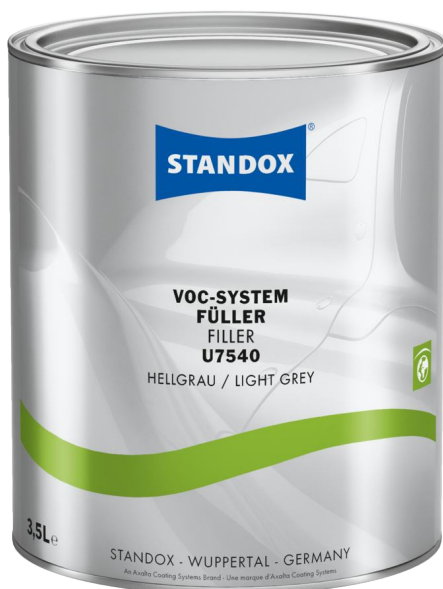


The Art of Refinishing.

Standex VOC System Filler U7540

Product preparation - application STANDARD SANDING VOC



It is strongly recommended to use appropriate personal protection equipment during application to avoid respiratory, skin and eye irritation.



Acid Primer or epoxy primer
 Old or original paintwork well sanded and cleaned
 OEM primer (e-coat), sanded and cleaned
 Surfaces pretreated with 2K polyester products and then finely sanded and cleaned
 Glass fibre reinforced polyester substrates, free of release agents, sanded and cleaned



Filler		Hardener		Thinner	
Volume	Weight	Volume	Weight	Volume	Weight
7	100	1	10	10 %	6
U7540		VOC 10-20 VOC 20-25 VOC 25-30 VOC 30-40		VOC T 15-30 VOC T 30-40	



Pot life at 20°C: 1 hr 30 min - 2 hr



	Spray nozzle	Spray pressure	
Compliant	1.6 - 1.8 mm	1.5 - 2 bar	inlet pressure
HVLP	1.7 - 1.9 mm	0.7 bar	atomisation pressure
see manufacturer's instructions			



1 - 3 coats intermediate and final flash-off: 5 min - 15 min



	VOC10-20/VOC20-25/VOC25-30/VOC30-40
20 °C	3 hr - 4 hr
60 - 65 °C	30 min - 40 min



Guideline for short wave IR equipment
 Half power: 5 min
 Full power: 15 min



P400 - P600



Standocryl 2K Topcoats
 Basecoat + clearcoat

VOC compliant


2004/42/IB(c)(540) 540: The EU limit value for this product (product category: IIB(c)) in ready to use form is maximum 540 g/l of VOC. The VOC content of this product in ready to use form is maximum 540 g/l.

Stadox VOC System Filler U7540

Product preparation - application STANDARD SANDING HS



It is strongly recommended to use appropriate personal protection equipment during application to avoid respiratory, skin and eye irritation.



Acid Primer or epoxy primer
 Old or original paintwork well sanded and cleaned
 OEM primer (e-coat), sanded and cleaned
 Surfaces pretreated with 2K polyester products and then finely sanded and cleaned
 Glass fibre reinforced polyester substrates, free of release agents, sanded and cleaned



Filler		Hardener		Thinner	
Volume	Weight	Volume	Weight	Volume	Weight
4	100	1	17	5 - 10 %	4 - 7
U7540		HS 5-15 HS 15-25 HS 20-30 HS 25-40		2K 10-20 2K 15-25 2K 20-25 2K 25-35 2K 35-40 VOC T 15-30 VOC T 30-40	



Pot life at 20°C: 1 hr - 1 hr 30 min



	Spray nozzle	Spray pressure	
Compliant	1.6 - 1.8 mm	1.5 - 2 bar	inlet pressure
HVLP	1.7 - 1.9 mm	0.7 bar	atomisation pressure
see manufacturer's instructions			



1 - 3 coats intermediate and final flash-off: 5 min - 15 min



	HS5-15/HS15-25/HS20-30/HS25-40
20 °C	3 hr - 4 hr
60 - 65 °C	30 min - 40 min



Guideline for short wave IR equipment
 Half power: 5 min
 Full power: 15 min



P400 - P600



Standocryl 2K Topcoats
 Basecoat + clearcoat

VOC compliant


2004/42/IB(c)(540) 540: The EU limit value for this product (product category: IIB(c)) in ready to use form is maximum 540 g/l of VOC. The VOC content of this product in ready to use form is maximum 540 g/l.

Standex VOC System Filler U7540

Product preparation - application STANDARD SANDING MS



It is strongly recommended to use appropriate personal protection equipment during application to avoid respiratory, skin and eye irritation.



Acid Primer or epoxy primer
 Old or original paintwork well sanded and cleaned
 OEM primer (e-coat), sanded and cleaned
 Surfaces pretreated with 2K polyester products and then finely sanded and cleaned
 Glass fibre reinforced polyester substrates, free of release agents, sanded and cleaned



Filler		Hardener		Thinner	
Volume	Weight	Volume	Weight	Volume	Weight
3	100	1	21	5 - 10 %	4 - 8
U7540		MS 25-40 MS 5-15 MS X 15-30 MS X 5-25		2K 10-20 2K 15-25 2K 20-25 2K 25-35 2K 35-40	



Pot life at 20°C: 1 hr - 2 hr



	Spray nozzle	Spray pressure	
Compliant	1.6 - 1.8 mm	1.5 - 2 bar	inlet pressure
HVLP	1.7 - 1.9 mm	0.7 bar	atomisation pressure
see manufacturer's instructions			



1 - 3 coats intermediate and final flash-off: 5 min - 15 min



	MS5-15/MS25-40/MSX5-25/MSX15-30
20 °C	3 hr - 4 hr
60 - 65 °C	30 min - 40 min



Guideline for short wave IR equipment
 Half power: 5 min
 Full power: 15 min



P400 - P600



Standocryl 2K Topcoats
 Basecoat + clearcoat

VOC compliant

2004/42/IIB(c)(540) 540: The EU limit value for this product (product category: IIB(c)) in ready to use form is maximum 540 g/l of VOC. The VOC content of this product in ready to use form is maximum 540 g/l.

Stadox VOC System Filler U7540

Products


Stadox VOC System Filler U7540

Stadox Hardener HS 15-25
Stadox Hardener HS 20-30
Stadox Hardener HS 25-40
Stadox Hardener HS 5-15
Stadox Hardener MS 25-40
Stadox Hardener MS 5-15
Stadox Hardener MS X 5-25
Stadox Hardener MS X 15-30
Stadox Hardener VOC 10-20
Stadox Hardener VOC 20-25
Stadox Hardener VOC 25-30
Stadox Hardener VOC 30-40

Stadox Thinner 2K 10-20
Stadox Thinner 2K 15-25
Stadox Thinner 2K 20-25
Stadox Thinner 2K 25-35
Stadox Thinner 2K 35-40
Stadox Thinner VOC 15-30
Stadox Thinner VOC 30-40

Stadox VOC System Filler U7540


Product mix



Mixing ratios with special agents are available in the productmix table on Standwin iQ and in the specific TDS. The choice of Hardener and Thinner should be made according to application temperature and size of repair.

VOC 10-20	Accelerated fast hardener suitable for Micro Repair, spot and panel repairs. Recommended for cooler application conditions e.g. 10-20°C.
VOC 20-25	Medium hardener suitable for panel and multi panel repairs. Recommended for application temperature of 20-25°C.
VOC 25-30	Medium-slow hardener suitable for medium to large size repairs. Recommended also for warm conditions e.g. 25-30°C.
VOC 30-40	Non-accelerated slow hardener suitable for medium to large size repairs. Recommended for use in hot climates e.g. 30-40°C.
HS 5-15	Accelerated fast hardener suitable for Micro and Spot repairs. Recommended for cooler application conditions. Suitable for Stadox Fillers for air drying at lower temperatures.
HS 15-25	Medium hardener suitable for panel and multi panel repairs. Recommended for application temperature of 15-25°C.
HS 20-30	Medium-slow hardener suitable for medium to large size repairs. Recommended also for warm conditions e.g. 20-30°C.
HS 25-40	Non-accelerated slow hardener suitable for medium to large size repairs. Recommended for use in hot climates e.g. 25-40°C.
MS 5-15	Accelerated fast hardener suitable for Micro and Spot repairs. Recommended for cooler application conditions. Suitable for Stadox Fillers for air drying at lower temperatures.
MS X 5-25	Fast hardener suitable for Micro Repair, Spot and panel repairs. Recommended for application temperature up to 25°C.
MS X 15-30	Medium hardener suitable for panel and multi panel repairs. Recommended also for warm conditions up to 30°C.
MS 25-40	Non-accelerated slow hardener suitable for medium to large size repairs. Recommended for use in hot climates e.g. 25-40°C.
2K 10-20	Accelerated fast thinner suitable for Micro Repair, spot and panel repairs. Recommended for cooler application conditions e.g. 10-20°C.
2K 15-25	Fast thinner suitable for Micro Repair, Spot and panel repairs. Recommended for temperature of 15-25°C.
2K 20-25	Medium thinner suitable for panel and multi panel repairs. Recommended for application temperature of 20-25°C.
2K 25-35	Medium-slow thinner suitable for medium to large size repairs. Recommended also for warm conditions e.g. 25-35°C.
2K 35-40	Slow thinner suitable for medium to large size repairs. Recommended for use in hot climates e.g. 35-40°C.
VOC T 15-30	Medium thinner suitable for panel, multi panel and large size repairs. Recommended for application temperature e.g. 15-30°C.
VOC T 30-40	Slow thinner for medium to large size repairs. Recommended for use in hot climates e.g. 30-40°C.

60 - 80 µm per coat



Stadox VOC System Filler U7540



Clean after use with a suitable solventbased guncleaner.

Remarks

- Material has to be at room temperature (18-25°C) before use.
- Mix thoroughly and put can on mixing machine.
- Allow additional time for preheating up to panel temperature.
- When isolating certain spots - even on problem substrates - the best results are achieved with a medium film thickness of 80-120µm in 2 coats, after either air drying overnight or force drying/IR drying. With problem substrates, careful pretreatment is necessary and the surfacer must be applied to the entire area.
- For dry film thicknesses of more than 150 micron air dry overnight at 20°C or 40 minutes at 60-65°C.
- Surplus ready for use material should not be returned to original can.
- The filler can be mixed with maximum 15% Standocryl VOC Topcoat. Drying and sanding properties will change.
- In countries without VOC legislation Standox Basecoat/Standocryl 2K Topcoat/Standocryl 2K Topcoat NEW can be used as well.

Consult Safety Data Sheet prior to use. Observe the precautionary notices displayed on the container.

All other products referred to in the refinish build up are from our Stadox product range. System properties will not be valid when the related material is used in combination with any other materials or additives which are not part of our Stadox product range, unless explicitly indicated otherwise.

For professional use only! The information provided in this documentation has been carefully selected and arranged by us. It is based upon our best knowledge on the subject at the date of issuance. The Information is given for information purposes only. We are not liable for its correctness, accuracy and completeness. It is up to the user to check the information with regard to up-to-dateness and suitability for his intended purpose. The intellectual property in this Information, including patents, trademarks and copyrights, is protected. All rights reserved. The relevant Material Safety Data Sheet and Warnings displayed on the product label need to be observed. We may modify and/ or discontinue operation of all or portions of this Information at any time in our sole discretion, without notice and assume no responsibility to update the Information. All rules set forth in this clause shall apply accordingly for any future changes and amendments.

