




## **Standohyd Color Blend**

- **For blending-in Standohyd Basecoat**
- **Easy handling**
- **Ready to spray**

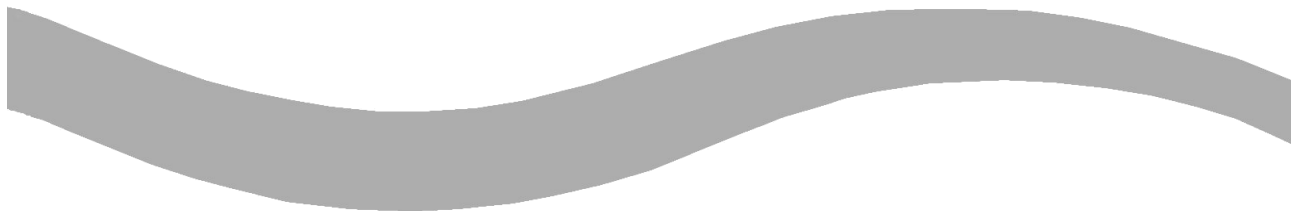

### **Technical Description:**

- Ready to spray
- or
- Mix 1:1 with Standohyd Basecoat

# Standohyd Color Blend

## Substrate:

For preparation of repair areas see Standox Painting Systems S 9.5 / 9.6 and for alternative use of Standohyd Color Blend see Standox Painting Systems S 9.7 / 9.8. Keep surface for priming with filler as small as possible.

## Pretreatment / Cleaning:



For substrate preparation information see Standox Painting System S1.




Use air fed respirator. Refer to relevant Health and Safety Data sheets.

## Application:

### Blending-in Standohyd Basecoat directly with Standohyd Color Blend

- Spray blending area with one coat of Standohyd Color Blend.
- Apply mixed Standohyd Basecoat in the wet film until covered.
- Blend-in the overlapping area with reduced air pressure (0.8 - 1.5 bar).



Standocryl VOC Clears

# Standohyd Color Blend

## Substrate:

For preparation of repair areas see Standox Painting Systems S 9.5 / 9.6 and for alternative use of Standohyd Color Blend see Standox Painting Systems S 9.7 / 9.8. Keep surface for priming with filler as small as possible.

## Pretreatment / Cleaning:



For substrate preparation information see Standox Painting System S1.



Use air fed respirator. Refer to relevant Health and Safety Data sheets.


### Note:

Occasionally it may be necessary to obtain opacity on the filled area before proceeding.

## Application:

### Blending-in with Standohyd Basecoat mixed with Standohyd Color Blend

- Mix Standohyd Basecoat 1:1 with Standohyd Color Blend
- Blend-in the overlapping area with reduced air pressure (by 0.5 - 1.0 bar)



Standocryl VOC Clears

# Standohyd Color Blend

---

**Flashpoint:**

- 80°C / 176°F
- 

**Specific Gravity:**

- 1.02 g/cm<sup>3</sup>
- 

**Solid Content****(without thinner added):**

- 19.9 Weight %
  - 17.7 Volume %
- 

**Theoretical****Coverage:**

- 20.8-23.9 m<sup>2</sup>/l at 8 micron dry film thickness

**Cleaning of equipment:**

Clean after use with Standox Cleaning Thinner

---

**Import Remarks:**

- Do not apply Standohyd Color Blend up to undamaged edges of panels.

For professional use only! The information provided in this documentation has been carefully selected and arranged by us. It is based upon our best knowledge on the subject at the date of issuance. The Information is given for information purposes only. We are not liable for its correctness, accuracy and completeness. It is up to the user to check the information with regard to up-to-dateness and suitability for his intended purpose. The intellectual property in this Information, including patents, trademarks and copyrights, is protected. All rights reserved. The relevant Material Safety Data Sheet and Warnings displayed on the product label need to be observed. We may modify and/ or discontinue operation of all or portions of this Information at any time in our sole discretion, without notice and assume no responsibility to update the Information. All rules set forth in this clause shall apply accordingly for any future changes and amendments.